## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Wall Light

Supplier's address: Zhongshan Zhaoliang Lighting Co., Ltd., 7/F, No. 30 Qingji Street, Tiebian Vil-

lage, Henglan Town, Zhongshan City, China

Model identifier: 201019012

Type	of light	source:
------	----------	---------

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type	Connec-		
(or other electric interface)	tion by wire		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No


## **Product parameters**

Product parameters					
Parameter		Value	Parameter	Value	
General product parameters:					
<u> </u>	mption in on- 00 h), rounded st integer	12	Energy efficiency class	Е	
dicating if it refe a sphere (360º)	s flux (φuse), in- ers to the flux in , in a wide cone arrow cone (90º)	1 350 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000	
On-mode pow pressed in W	ver (P <sub>on</sub> ), ex-	12,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00	
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80	
Outer dimen-	Height	100	Spectral power dis-	See image	
sions without	Width	100	tribution in the	in last page	
separate con- trol gear, light-	Depth	100	range 250 nm to 800 nm, at full-load		

ing control parts and non-lighting control parts, if any (millimetre)						
Claim of equivalent power <sup>(a)</sup>		-	If yes, equivalent power (W)	-		
			Chromaticity coordinates (x and y)	0,313 0,337		
Parameters for LED and OLED light sources:						
R9 colour rende	ring index value	1	Survival factor	0,90		
the lumen maintenance factor		0,96				
Parameters for	Parameters for LED and OLED mains light sources:					
displacement fa	ctor (cos φ1)	1,00	Colour consistency in McAdam ellipses	6		
replaces a flu	ED light source norescent light integrated balar wattage.	_(b)	If yes then replace- ment claim (W)	-		
Flicker metric (P	st LM)	1,0	Stroboscopic effect metric (SVM)	0,9		

(a)<sub>'-'</sub> : not applicable;

(b)<sub>'-'</sub> : not applicable;

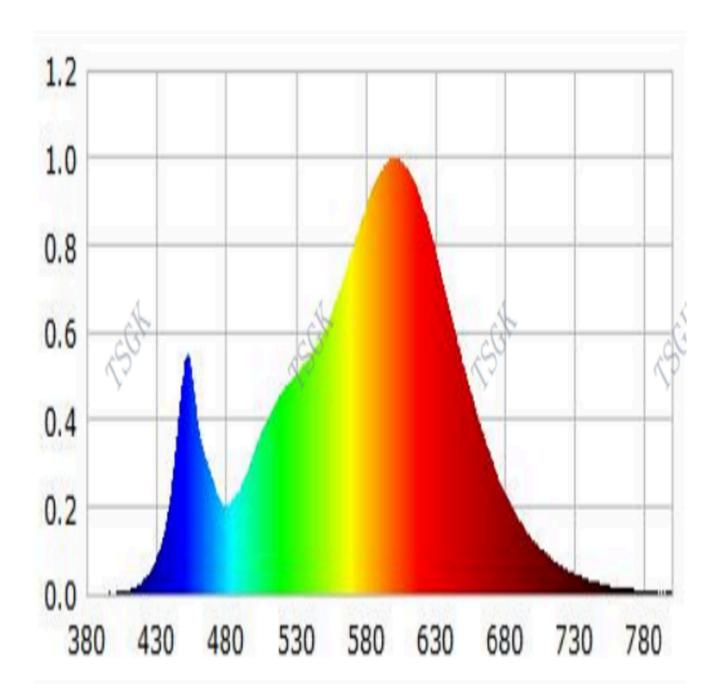

Model placed on the Union market from 09/05/2023



**EPREL registration number:** 1585219 <a href="https://eprel.ec.europa.eu/qr/15">https://eprel.ec.europa.eu/qr/15</a>

85219

Supplier: StoneX Trading (Authorised representative) Website: https://goecolighting.fr/

**Customer care service:** 

Name: Zhongshan Zhaoliang Lighting Co., Ltd. Website:

Email: goecolightingfr@163.com Phone: +447845991423

Address:

7/F, No. 30 Qingji Street, Tiebian Village, Henglan Town, Zhongshan

City, China